

TS.4204 Door Closer

Power Adjustable EN2-4 by Spring



Silver (SE)



Satin Nickel Plate (SNP)



Polished Nickel Plate (PNP)



Electro Brass (PVD)

Product Overview

- ✓ Variable power adjustment EN2-4
- ✓ Engineered from exceptional high quality components
- ✓ CE marked and UL listed
- ✓ Universal fitting
- ✓ Back check and delayed action features are as standard on this model
- ✓ Easy to read instructions, saving over 12 minutes of fitting time
- ✓ Corrosion Grade 3 – Recommended for internal use



Specification Overview




Fire Tested to
EN1634
& UL 10C



Max Door
Weight 80kg



Opening Angle
180°



Max Door Width
1100mm



Adjustable
Closing Speed



Guarantee




Universal
Application



Power Size
EN2-4



Adjustable
Delayed Action



Back Check




4204DABC-
CPR131218



Rut Lock



IFCC 1433

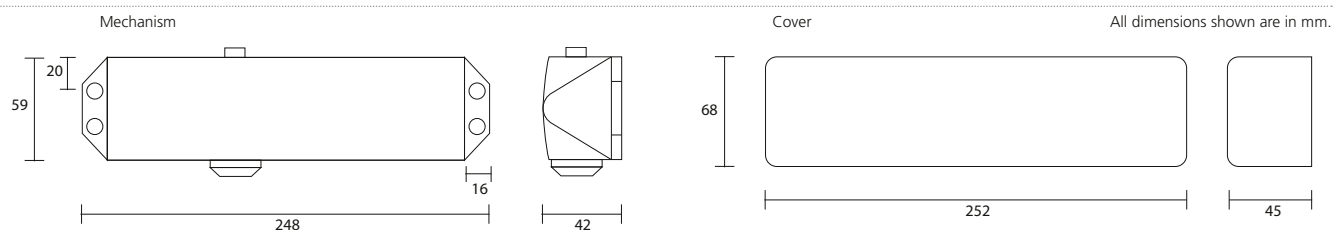

For fitting instructions see website - www.rutlanduk.co.uk

Technical Information

BS EN 1154 Classification

TS.4204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

Standard Arm Fig 1.

4	8	4 2	1	1	3
---	---	--------	---	---	---

BS EN 1634 Fire Test

TS.4204 closers have been tested to EN 1634 for 30, 60 and 120 minute door sets. Test certificates are available on request.

Options

- Hold-Open arm (Not to be used on fire doors)
- Drop plate

Options not covered by CE.

Other Benefits

- Painted and Plated finishes

Description	EN Size	Finish	Re-order Code	Product Code	Box Qty
 <p>TS.4204 Combined unit closer, flat bar armset, cover, PA bracket with DELAYED ACTION & BACK CHECK</p>	2-4	Silver	12109	TS.4204DABC.SLFB.SESE	6
	2-4	Satin Nickel	12110	TS.4204DABC.SLFB.SNPSNP	6
	2-4	Polished Nickel	12111	TS.4204DABC.SLFB.PNPPNP	6
	2-4	Electro Brass	12112	TS.4204DABC.SLFB.PVDPVD	6